# Bush Hog® TOUGH High Performance Subcompact Products

BUSH HOG









# The Only Subcompact Products Built Bush Hog® TOUGH


Just like the rotary cutters that built the Bush Hog legend for reliability and durability, Bush Hog High Performance Subcompact Products deliver superior performance the first day on the job and for years to come. Choose performance that lasts. Choose Bush Hog.



# **BUSH HOG... Choose Performance That Lasts.**

The Bush Hog<sup>®</sup> brand means superior performance now and for years to come. It was born more than 50 years ago with the famous Bush Hog Rotary Cutters. From the very beginning, Bush Hog TOUGH Features were built into these machines. Many Bush Hog mowers over 30 years old are still on the job today.

Bush Hog<sup>®</sup> TOUGH Features come standard on every Bush Hog<sup>®</sup> High Performance Subcompact Implement for tractors to 24 HP. Choose Bush Hog TOUGH landscape rakes, tillers, box blades, rear blades and post hole diggers. Choose colors to match your tractor.

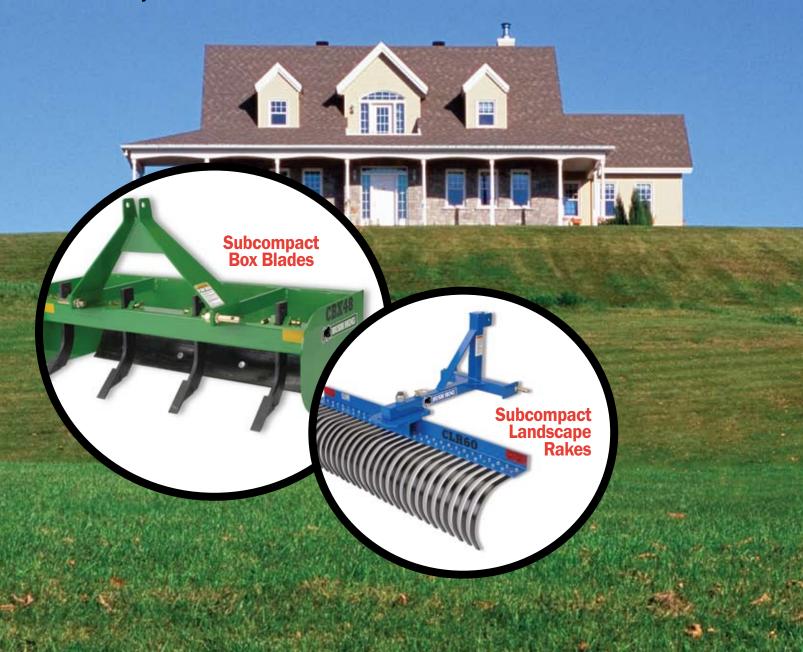

# Bush Hog<sup>®</sup> TOUGH Features Mean Superior Performance Now And For Years To Come.

## **Subcompact Tillers**

Bush Hog subcompact tillers for seedbed preparation and landscaping are available in 39 and 48 inch tilling widths.

#### **PERFORMANCE FEATURES**

39 and 48 inch tilling widths 16 and 20 blades For minimum of 15 PTO tractor HP 4 inch offset to the right and center mount Side chain drive Standard slip clutch

#### **BUSH HOG® TOUGH FEATURES**

TOUGH Heavy Duty Gearbox TOUGH Slip Clutch Is Standard TOUGH Adjustable Skid Shoes TOUGH Formed Tailgate TOUGH Double Strap Hitch

## Subcompact Post Hole Diggers

Bush Hog subcompact post hole diggers for digging post holes and holes for plants and trees.

#### **PERFORMANCE FEATURES**

32 inch maximum digging depth For maximum of 24 PTO tractor HP Auger diameters of 4, 6 and 9 inches (semi-double flight on 9 inch size) Shear pin protection

#### **BUSH HOG® TOUGH FEATURES**

TOUGH Tubular Construction TOUGH 3 Year Gearbox Limited Warranty TOUGH Boom And Yoke Construction

## BUY NOW WITH RETAIL FINANCING

Low APR
Low Monthly Payments
Easy, Quick Service

## **Subcompact Box Blades**

Bush Hog subcompact box blades for scraping, leveling, landscaping, backfilling and grading are available in 48 and 60 inch widths.

### PERFORMANCE FEATURES

48 and 60 inch working widths
12 inch box depth for both models
5/8 inch x 2 1/2 inch scarifier size
4 and 5 scarifier teeth
2 blades with reversible cutting edge for both models
For maximum of 24 PTO tractor HP
Quick hitch compatibility
Lower hitch position for smaller tractors

### **BUSH HOG® TOUGH FEATURES**

TOUGH Heavy Duty A Frame TOUGH Reversible Cutting Edge TOUGH Powder Coat Paint

## Subcompact Landscape Rakes

Bush Hog subcompact landscape rakes for removing debris and creating a groomed appearance are available in 48 and 60 inch widths.

## PERFORMANCE FEATURES

a Ala

48 and 60 inch working widths For maximum of 24 PTO tractor HP 18 and 36 degree pivot for both models 1 inch tine spacing

## **BUSH HOG® TOUGH FEATURES**

TOUGH Tubular Construction TOUGH Twin Bolt Tine Attachment TOUGH Powder Coat Paint TOUGH Heat Treated Tines

# **Subcompact Rear Blades**

Bush Hog subcompact rear mounted blades for scraping, leveling, landscaping, backfilling and grading are available in 48, 60 and 72 inch widths.

### PERFORMANCE FEATURES

48, 60 and 72 inch moldboard widthsFor maximum of 24 PTO tractor HP12 inch moldboard height1/4 inch moldboard thickness15 and 30 degree forward and reverse angle adjustment

## **BUSH HOG® TOUGH FEATURES**

TOUGH A Frame Construction TOUGH 1/4 Inch Moldboard Thickness TOUGH Welded On Cutting Edge TOUGH Powder Coat Paint BUSH HOO

# **Bush Hog® TOUGH Subcompact Tillers**

MODELS	RTC40	RTC48
Total Width	43 inches	53 inches
Tilling Width	39 inches	48 inches
Number of Blades	16	20
Minimum Tractor HP	15 PTO	15 PTO
Type Hitch	ASAE Cat. I / QH	ASAE Cat. I / QH
Offset	4 inches Offset to the Right	Center Mount
Number of Flanges	4	5
Rotor Speed	253 RPM/540 PTO	253 RPM/540 PTO
Type of Blades	C-type	C-type
Power to Rotor Transmission	Chain Drive (#60)	Chain Drive (#60)
Depth of Cut	6 inches	6 inches
Driveline	Slip Clutch Standard	Slip Clutch Standard
Approximate Weight	308 lbs	335 lbs
Warranty	1 year limited	l warranty
FEATURES	Available in major tractor colo	rs except John Deere® Green

# **Subcompact Landscape Rakes**

MODELS	CLR48	CLR60
Working Width	48 inches	60 inches
Type Hitch	ASAE Cat. I / QH	ASAE Cat. I / QH
Maximum Tractor HP	24 PTO	24 PTO
Approximate Weight	126 lbs	143 lbs
Rake Pivot	$18^\circ$ and $36^\circ$	$18^\circ$ and $36^\circ$
Pivot King Pin	1 1/4 inches	1 1/4 inches
Tine Spacings	1 inch	1 inch
Tine Size	1 inch	1 inch
Warranty	1 year limited	warranty
FEATURES	Available in majo	r tractor colors

## **Subcompact Box Blades**

MODELS	CBX48	CBX60
Working Width	48 inches	60 inches
Box Depth	12 inches	12 inches
Side End Plate Thickness	3/16 inches	3/16 inches
Scarifier Size	5/8 inches x 2 1/2 inches	5/8 inches x 2 1/2 inches
Number of Scarifier Teeth	4 teeth	5 teeth
Type Hitch	ASAE Cat. I/QH	ASAE Cat. I/QH
Cutting Edge	Reversible	Reversible
Number of Cutting Edges	2 Blades, Bolt on Reversible Cutting Edge	2 Blades, Bolt on Reversible Cutting Edge
Maximum Tractor HP	24 PTO	24 PTO
Approximate Weight	248 lbs	258 lbs
Warranty	1 year limited warranty	
FEATURES	Available in major tractor colors	

## **Subcompact Rear Blades**

## **Subcompact Post Hole Diggers**

MODEL	PHDC	
Approximate Weight	125 lbs	
Maximum Tractor HP	24 PTO	
Tractor PTO	540 RPM	
Driveline Size	ASAE Cat. I	
Maximum Digging Dept	h 32 inches	
Type Hitch	ASAE Cat. I	
Auger Diameters	4 inches, 6 inches, 9 inches (semi-double flight)	
Yoke	3 inch tubing	
Boom	3 inch tubing	
Component Protection	Shear Pin	
Warranty	1 year limited warranty, 3 year gearbox limited warranty	
FEATURES	Available in major tractor colors	

MODELS	CRB48	CRB60	CRB72
Moldboard Widths	48 inches	60 inches	72 inches
Approximate Weight	136 lbs	150 lbs	164 lbs
Maximum Tractor HP	24 PT0	24 PTO	24 PTO
Type Hitch	ASAE Cat. I/QH	ASAE Cat. I/QH	ASAE Cat. I/QH
Moldboard Height and Thickness	12 inches x 1/4 inches	12 inches x 1/4 inches	12 inches x 1/4 inches
Moldboard Cutting Edge	3/8 x 3 inches	3/8 x 3 inches	3/8 x 3 inches
King Pin Diameter	1 1/4 inches	1 <sup>1/4</sup> inches	1 <sup>1/4</sup> inches
Angle Adjustment	15° & 30° Forward & Reverse	15° & 30° Forward & Reverse	$15^\circ\&30^\circ$ Forward & Reverse
Warranty		1 year limited warranty	

Available in major tractor colors

## Get Big Performance With Your Small Tractor

Choose Bush Hog TOUGH landscape rakes, tillers, box blades, rear blades and post hole diggers. Choose colors to match your tractor.

**SEE MORE THAN 70 PRODUCTS** 

Bush Hog builds more than 70 products-all with Bush Hog TOUGH Features as standard equipment. Bush Hog products include Finishing Mowers, Squealer<sup>®</sup> Rotary Cutters, Razorback<sup>®</sup> Rotary Cutters, Front End Loaders, Backhoes, Utility Vehicles and Zero Turn Mowers.

BBC 48

Watch field and test performance videos, read about Great Performances of Bush Hog products, brochures and service manuals and spec out your new utility vehicles at www.bushhog.com



#### www.bushhog.com

Bush Hog<sup>®</sup>, L.L.C. P.O. Box 1039 Selma, AL 36702-1039 (334) 874-2700 ©April 2008 Bush Hog, LLC

Dealer Info: